


1.PHYSICAL CHARACTERISTICS(mm)

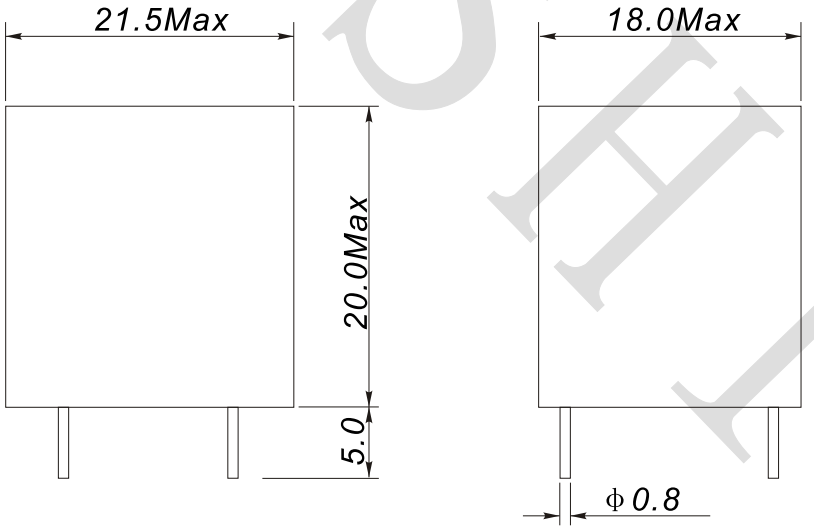

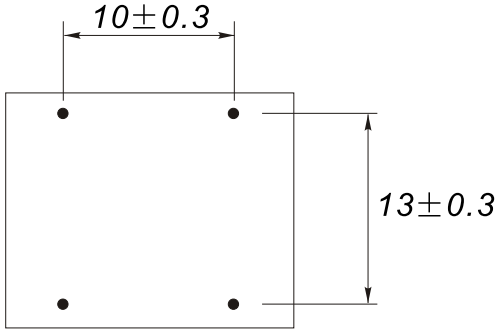

2.ELECTRONICAL SCHEMATIC

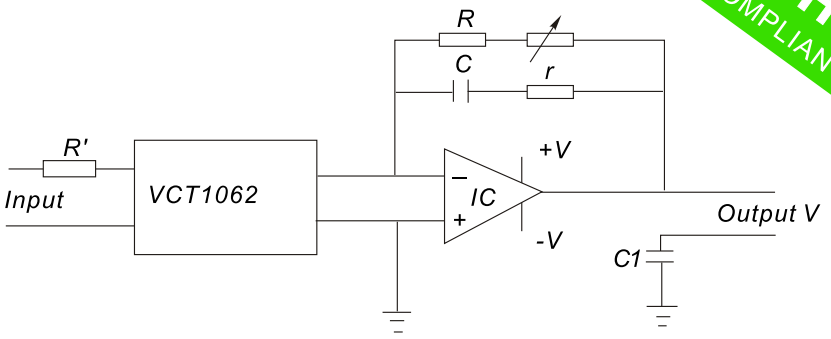

3.ELECTRONICAL SPECIFICATIONS

Turns ratio: 1:1

Rated input: 2mA(0~1000V)

Rated output: 2mA(0~10V)

Overload multiples: 2

Linearity: ≤0.1%

Phase-Shifting: ≤15'

Hi-Pot: 2500VAC

Operating temperature: -40℃ to +80℃

Note:

1.Solderability:leads shall meet MIL-STD-202, Method 208D for solderability.

2.Flammability: UL94V-0

3.ASTM oxygen index: >28%

NOTES:

Temp 25℃ 48%RH

RoHS Compliant

NAME:	Voltage transformer		
CUSTOMER P/N:		DATE:	2011-10-18
SHINHOM P/N:	VCT1062	REV: A0	PAGE
DRAWN BY	CHECKED BY	APPROVE BY	

SHINHOM

SHAANXISHINHOM ENTERPRISE CO LTD

The Document property belong to SHINHOM & is not allowed to be duplicated without authorization

SHINHOM